


Extreme Condition Control Assembly



Handle Control Assembly

A handle control assembly is comprised of the hand crank and gear box, a pair of control housings, a drive cable and a safety connector. The handle grip consists of a lightweight housing and hand crank to propel the source to the exposure position and back. The molded handle is specifically designed to maximize crank speed and minimize fatigue. The control housing assembly consists of an outer sheath of flexible cable with a yellow and black cover. The drive cable consists of spiral wound flexible steel.

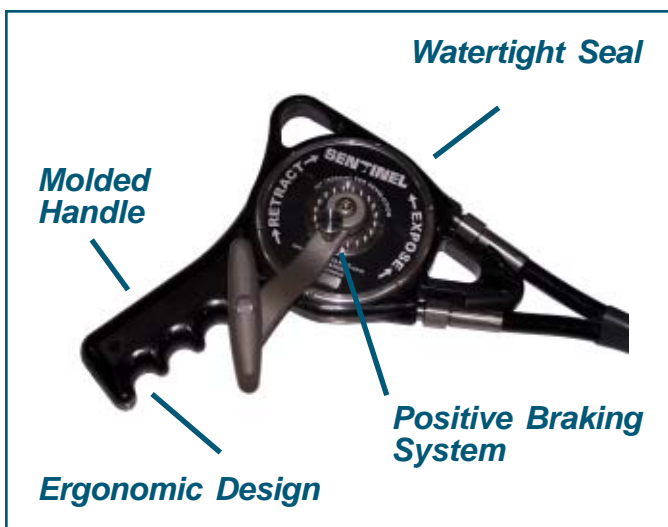

Applications

Designed to be used with the SENTINEL™ 880 Series Source Projectors as well as the 660 Gamma Ray Projector

Features

- Available in 25, 35 and 50 ft (7.5, 10.5 and 15 m)
- Light weight polyurethane ergonomic handle design
- Water resistant handle assembly preventing ingress of water, dirt and sand
- Control housings are constructed of light weight, nonmetallic 3-ply material twined together for maximum dent resistance
- Yellow and black housings for high visibility during night operations
- Large gear ratio providing 1 foot of travel per revolution (ALARA)
- Commercial grade sealed ball bearing
- Noncorrosive stainless steel end fittings
- Extreme temperature operation from -40°F to 212°F

Designed, tested and manufactured to meet the requirements of ANSI N432-1980 and ISO 3999-1 2000E

Sales

SENTINEL™
QSA Global, Inc.
6765 Langley Drive
Baton Rouge, Louisiana 70809
USA

Telephone +1 225 751 5893
Toll Free +1 800 225 1383
Fax +1 225 756 0365 or
+1 225 751 8082

Manufacturing

SENTINEL™
QSA Global, Inc.
40 North Avenue
Burlington, Massachusetts 01803
USA

Telephone +1 781 272 2000
Toll Free +1 800 815 1383
Fax +1 781 273 2216

Email sales@SENTINELNDT.com

Website www.SENTINELNDT.com

CONTROL UNITS & COMPONENTS

DESCRIPTION	SIZE	ITEM NO.
Extreme Condition	25 ft (7.5 m)	SAN88225
Handle Grip Control Unit	35 ft (10.5 m)	SAN88235
	50 ft (15 m)	SAN88250
Extreme Condition	25 ft (7.5 m)	SAN88225R
Reverse Handle Grip Control Unit	35 ft (10.5 m)	SAN88235R
	50 ft (15 m)	SAN88250R
Extreme Condition	25 ft (7.5 m)	95034-25
Control Housing- Assembled Pair	35 ft (10.5 m)	95034-35
	50 ft (15 m)	95034-50
Drive Cable Assembly with Connector	50 ft (15 m)	55005
	70 ft (21 m)	55010
	100 ft (30 m)	55009
Extreme Condition Handle Grip Assembly		95002
661 Safety Connector Assembly		66103



All goods and services are sold subject to the terms and conditions of QSA Global, Inc. A copy of these terms and conditions is available upon request.

SENTINEL® is a registered trademark of QSA in USA, Canada, South Korea, and Europe.

All brand names and product names where used are acknowledged to be trademarks of their respective holders.

© 2007 QSA Global, Inc.

